


# OMNI / IRIDE

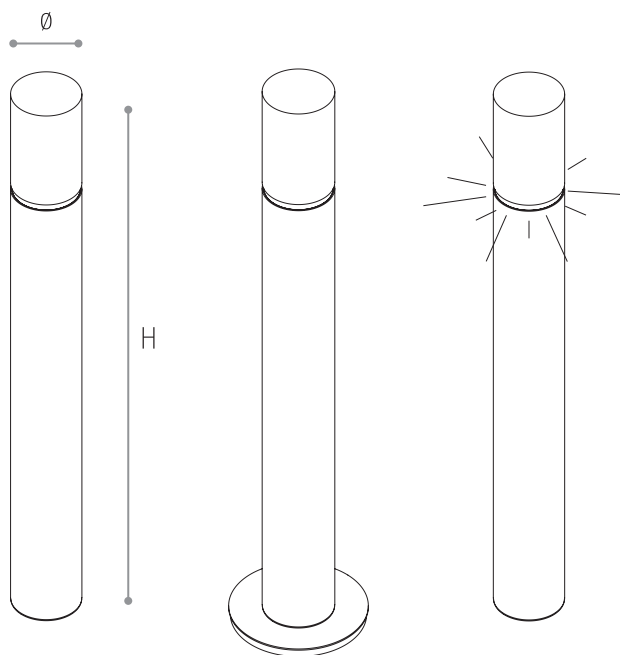

## OMNI

omnidirezionale, da interno e/o esterno  
Omni-directional, indoor or outdoor

## IRIDE

omnidirezionale, con luce  
Omni-directional, with light

---

## OMNI

Ø130 x H 1000

**System:** closed **No.of ways:** 2 coaxial **Power(W):** 50 **Impedance(Ohm):** 8 **X-over:** in-line full range **Freq.Resp(Hz):** 60-20K  
**Sensitivity(dB):** 87 **Drivers:** 1 x midwoofer d.130mm 1 x tweeter d.22mm

---

## IRIDE

Ø 130 x H 1000

**System:** pneumatic, with wave guide **No.of ways:** 2 **Power(W):** 75 **Impedance(Ohm):** 4-8-100V  
**X-over:** dedicated basing on the type of emission **Freq.Resp(Hz):** 55-20K **Sensitivity(dB):** 87  
**Drivers:** 1 x midwoofer d.130mm 1 x tweeter d.22mm **LIGHT > Power supply:** AC220V-12AC-DC 3W  
**Type:** 6 x radial leds 80lm/W

---

**Colours available:** white painted/ dark grey painted / green painted **Notes:** \*Optional bases (triangular bracket for gardens and round steel bracket for indoor) are available on demand. \*\*On demand Omni can be supplied with upper part painted in white, dark grey or green and body in polished or anodized aluminium. **N.B.** On demand can be painted with other RAL colours, with increase of 15% on price.